

DIAGRAM No. 5.

**Diagram No. 5.—Single-wire-rope Sling or Snottor.**

The load is carried on a single part. Safe loads are given in Tables Nos. 5 and 6.

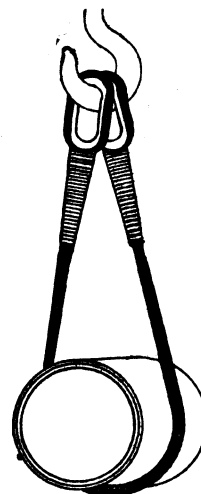


DIAGRAM No. 6.

**Diagram No. 6.—Single-wire-rope Sling carrying the Load on Two Parts.**

Safe loads are given in Tables Nos. 7 and 8.

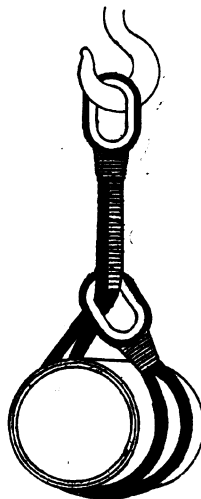


DIAGRAM No. 7

**Diagram No. 7.—Double-wire-rope Strop carrying the Load on a Single Part.**

Safe loads are given in Tables Nos. 19 and 20.

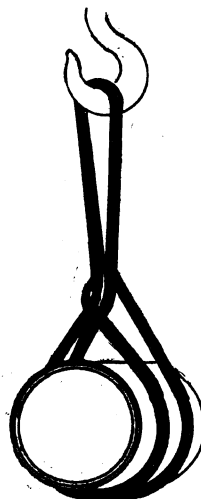


DIAGRAM No. 8.

**Diagram No. 8.—Endless-fibre-rope Sling.**

When the load is slung as shown in the diagram, there are two parts of the rope carrying the load.

The safe-working loads are shown in Tables Nos. 25 and 26.