



Second Schedule.

CLASS A.
Diagram No. 1.

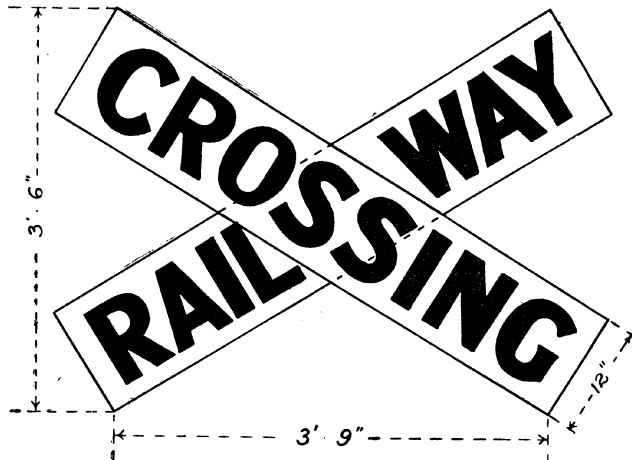

Black lettering on white ground.

CLASS B.
Diagram No. 2.



Black lettering on a lemon-yellow ground.

CLASS C.
Diagram No. 3.


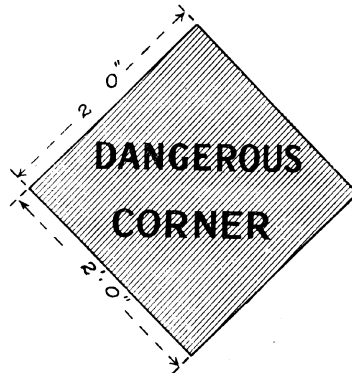


Diagram No. 4.




Black lettering on a lemon-yellow ground.

Diagram No. 5.

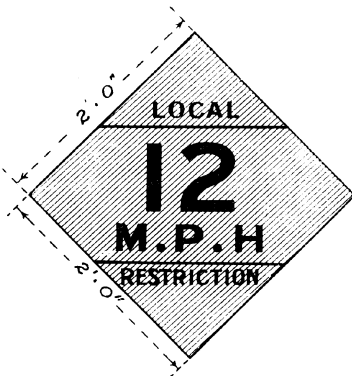


CLASS E.
Diagram No. 6.

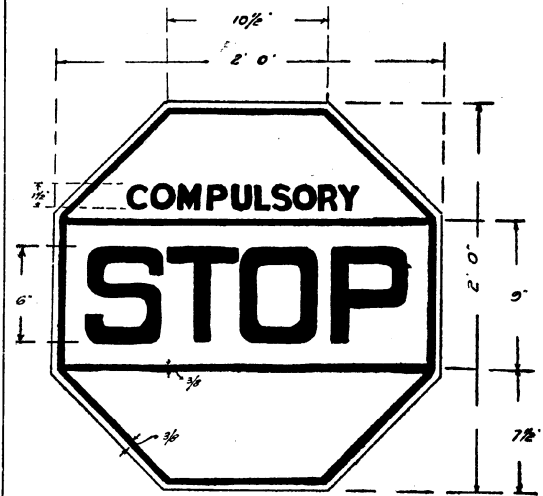

Black lines and lettering on a lemon-yellow ground.

CLASS F.
Diagram No. 7.



Black lettering on a white ground.

Third Schedule.

DESCRIPTION AND MEASUREMENTS OF LIGHTHOUSE SIGNS.

The lighthouse sign is to consist of three parts, one part being hereinafter described as the head, and corresponding to the portion marked "A" in the diagram hereunder, the second part being hereinafter described as the neck, and corresponding to the portion marked "B" in the said diagram, and the third part being hereinafter described as the body, and corresponding to the portion marked "C" in the said diagram.

The head shall be approximately in the form of a circle, not more than 2 ft. 10 in. nor less than 2 ft. 4 in. in diameter, and shall be the portion from which the flashlight shall shine through a coloured lens, or on which the reflector shall be placed, as the case may be. The reflector, or the aperture for the lens, as the case may be, shall be circular, and the diameter shall not be less than 10 in. On the head shall be conveyed the traffic warning by letters or an approved symbol, or both, through which also the flashlight (if any) may shine in a white or approximately white colour. On the